

VERSO® PRODUCT DATA SHEET

PRODUCT CODE

VCP132C


PRODUCT RANGE

Circuit Protection Miniture Circuit Breaker

DESCRIPTION

Single Pole 32A 6kA C Curve MCB

FEATURES

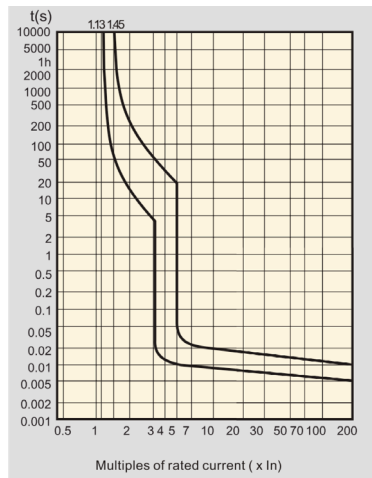

TECHNICAL INFORMATION

Height	86.5mm
Width	17.8mm
Depth	50mm
Weight	0.168 Kg
Short Circuit rating	6kA
Torque settings (out)	1.2Nm
Torque settings (In)	2.0Nm
Ambient temperature	-5 to +55 C
Integral MCB Type	C Curve
Number of Poles	Single Pole
Mounting type	Din Rail
Guarantee	10 Years
Frequency	50/60Hz
Current Rating	32A
Cable Clamp type	Sqaure cage clamp mechanism
Rated operating voltage	230/240 AC
Number of modules	One
IP Rating	IP2X
Packaging type	Box of 12
Operating characteristic	Type AC
Rated residual operating current	N/A
Lockable	Yes
Standards	EN 60898-1
Certified Independantly by	DEKRA
Country of origin	PRC

VERSO® DECLARATION OF CONFORMITY

PRODUCT CODE

VCP132C

DESCRIPTION

Single Pole 32A 6kA C Curve MCB

INTENDED USE

To protect against overload and short circuit

MANUFACTURER

Verso® Electrical
PGL House (Floor 1), West Point Industrial
Estate. Penarth Road. Cardiff. CF11 8JQ.
United Kingdom

RATINGS & CHARACTERISTICS

Voltage Rating	230V AC
Current Rating	32A
Frequency	50 Hz

DESIGNATED STANDARDS

EN 60898-1,
IEC 60898-1



I declare that the object of the declaration above is in conformity with the relevant harmonization legislation and national standards.

Signed on behalf of Verso® Electrical

William Winter (Ba/Bsc) | Managing Director